

LCS2650

26 INCH HIGH DEFINITION PROFESSIONAL GRADE LCD MONITOR
-with RS232C




The LCS2650 is a professional grade LCD monitor designed for public display, digital signage, financial, entertainment and transportation applications. The LCS2630 features full metal construction, 1920 X 1200 native resolution, fast 6.5ms response time for crystal clear video performance and RS232C for external control.

With its slim design, super wide viewing angle, advanced video processing, high color saturation and color accuracy, low power consumption and long service life the LCS2650 is the perfect choice for your next project.

Features

- Variable Black Level Adjustment
- Variable Back Light Adjustment
- Advanced Video Processing
- Durable Metal Construction
- Picture in Picture, Picture and Picture
- AutoAmbient Brightness Compensation
- Fanless Design for Quiet Operation
- Anti-Reflective Coated LCD panels
- 176+ Degree H / V Viewing Angle
- Infrared and RS232 Control
- VESA Mounting Hole Pattern
- Approvals: cUL / FCC
- One Year Parts & Labor Warranty
- Extended Warranties Available

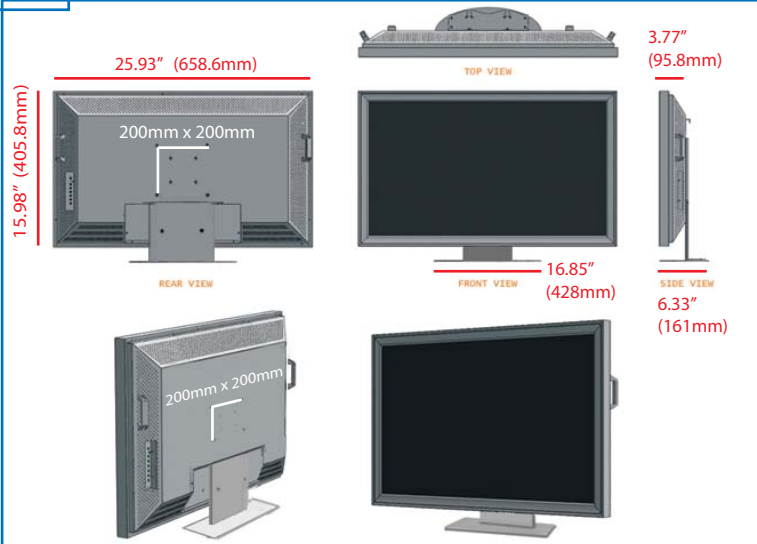

Specifications

Technology: TFT LCD
 Screen diagonal: 26" (686 mm)
 Screen area: 23.74" x 13.46" (578.8 x 326.8 mm)
 Resolution: 1920 x 1200
 Brightness: 500 cd/m2
 Contrast ratio: 1500:1
 Colors: 16.7 million
 Lifetime : 50,000h average
 Color gamut: 76% NTSC
 Aspect ratio: 16:9
 Viewing angle: H160°/V150°
 Response time: 6.5ms GtoG
 Color Control: 3200K-9300K, User

Inputs: DVI-D, VGA (D15), S-Video, Composite Video, Component video (YPbPr, YCbCr)
 Resolutions Supported: NTSC/PAL/SECAM , 720i/p, 1080i/p, XGA, WXGA, SXGA, RS232C
 Control: VESA Mounting: VESA 200x200mm
 Voltage: 100 - 240V (50Hz-60Hz)
 Power Consumption: <110W (On) <11W Stand-By
 Operating Temp: 41° to 104°F (5° to 40°C)
 Op. Humidity: 20 - 85%

Compliance: FCC, CE, cUL
 Weight: 27.63lbs (12kg)
 Gross Weight: 36.47lbs (16kg)

Included Accessories:
 Power cord, D-SUB 15pin cable , DVI-D 24 pin cable S-VIDEO cable, Component Mini Din 8 pin cable, RCA cable, Remote control, User's manual

OPTIONS

- Tempered Glass
- Open Frame Versions Available