

# LCS3230

32 INCH ENHANCED DEFINITION PROFESSIONAL GRADE LCD MONITOR  
-with RS232C




The LCS3230 is a professional grade LCD monitor designed for public display, digital signage, financial, broadcast, entertainment and transportation applications. The LCS3230 features full metal construction, 1366 x 768 native resolution, extremely fast 6.5ms response time for crystal clear video performance and RS232C for external control.

With its slim design, super wide viewing angle, advanced video processing, high color saturation and color accuracy, low power consumption and long service life the LCS3230 is the perfect choice for your next project.

## Features

- Variable Black Level Adjustment
- Variable Back Light Adjustment
- Advanced Video Processing
- Durable Metal Construction
- Picture in Picture, Picture and Picture
- AutoAmbient Brightness Compensation
- Fanless Design for Quiet Operation
- Anti-Reflective Coated LCD panels
- 176+ Degree H / V Viewing Angle
- Infrared and RS232 Control
- VESA Mounting Hole Pattern
- Approvals: cUL / FCC
- One Year Parts & Labor Warranty
- Extended Warranties Available

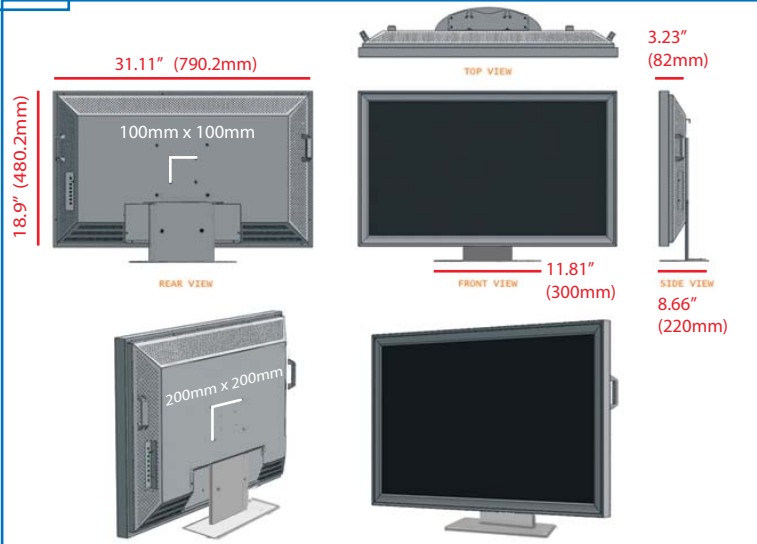

## Specifications

Technology: TFT LCD  
 Screen diagonal: 32.02" (812.8 mm)  
 Screen area: 27.91" x 15.69" (708 x 398 mm)  
 Resolution: 1366 x 768  
 Brightness: 500 cd/m<sup>2</sup>  
 Contrast ratio: 1200:1  
 Colors: 16.7 million  
 Lifetime: 50,000h average  
 Color gamut: 76% NTSC  
 Aspect ratio: 16:9  
 Viewing angle: 176°/176°  
 Response time: 6.5ms GtoG  
 Color Control: 3200K-9300K, User

Inputs: DVI-D, VGA (D15), S-Video, Composite Video, Component video (YPbPr, YCbCr)  
 Resolutions Supported: NTSC/PAL/SECAM, 720i/p, 1080i/p, XGA, WXGA, SXGA, RS232C  
 Control: VESA Mounting  
 Mounting: VESA 100x100, 200x200mm  
 Voltage: 100 - 240V (50Hz-60Hz)  
 Power Consumption: <180W (On) <22W Stand-By  
 Operating Temp: 41° to 104°F (5° to 40°C)  
 Op. Humidity: 20 - 80%

Compliance: FCC, CE, cUL  
 Weight: 36.4lbs (16.5kg)  
 Gross Weight: 44.1lbs (20kg)

Included Accessories:  
 Power cord, D-SUB 15pin cable, DVI-D 24 pin cable, S-VIDEO cable, Component Mini Din 8 pin cable, RCA cable, Remote control, User's manual

### OPTIONS

- Tempered Glass
- Open Frame Versions Available