

LCS4230

42 INCH HIGH DEFINITION PROFESSIONAL GRADE LCD MONITOR
-with RS232C




The LCS4230 is a professional grade LCD monitor designed for public display, digital signage, financial, broadcast, entertainment and transportation applications. The LCS4230 features full metal construction, 1920 x 1080p (progressive scan) native resolution, extremely fast 6.5ms response time for crystal clear video performance and RS232C for external control.

With its slim design, super wide viewing angle, HD resolution, advanced video processing, high color saturation and color accuracy, low power consumption and long service life the LCS4230 is the perfect choice for your next project.

Features

- Variable Black Level Adjustment
- Variable Back Light Adjustment
- Advanced Video Processing
- Durable Metal Construction
- Picture in Picture, Picture and Picture
- AutoAmbient Brightness Compensation
- Fanless Design for Quiet Operation
- Anti-Reflective Coated LCD panels
- 176+ Degree H / V Viewing Angle
- Infrared and RS232 Control
- VESA Mounting Hole Pattern
- Approvals: cUL / FCC
- One Year Parts & Labor Warranty
- Extended Warranties Available

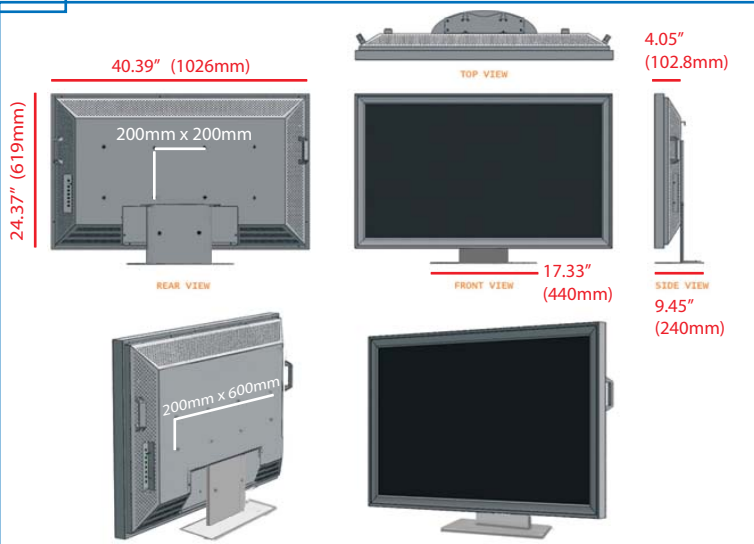

Specifications

Technology: TFT LCD
 Screen diagonal: 42.02" (1067 mm)
 Screen area: 36.61" x 20.59" (930 x 523 mm)
 Resolution: 1920 x 1080p
 Brightness: 500 cd/m²
 Contrast ratio: 1200:1
 Colors: 16.7 million
 Lifetime: 50,000h average
 Color gamut: 76% NTSC
 Aspect ratio: 16:9
 Viewing angle: 176°/176°
 Response time: 6.5ms GtoG
 Color Control: 3200K-9300K, User

Inputs: DVI-D, VGA (D15), S-Video, Composite Video, Component video (YPbPr, YCbCr)
 Resolutions Supported: NTSC/PAL/SECAM, 720i/p, 1080i/p, XGA, WXGA, SXGA, SXGA+, UXGA
 Control: RS232C (with loop through)
 Mounting: VESA 200x200, 200x600mm
 Voltage: 100 - 240V (50Hz-60Hz)
 Power Consumption: 235W (On) <15W Stand-By
 Operating Temp: 41° to 104°F (5° to 40°C)
 Op. Humidity: 20 - 80%

Compliance: FCC, CE, cUL
 Weight: 72.76lbs (33kg)
 Gross Weight: 86lbs (39kg)

Included Accessories:
 Power cord, D-SUB 15pin cable, DVI-D 24 pin cable, S-VIDEO cable, Component Mini Din 8 pin cable, RCA cable, Remote control, User's manual

OPTIONS

- Tempered Glass
- Bottom or Side Speakers
- HD-SDI Input
- Audio Amp
- Open Frame Versions Available