

# LCS5730

57 INCH HIGH DEFINITION PROFESSIONAL GRADE LCD MONITOR  
-with RS232C




The LCS5730 is a professional grade LCD monitor designed for public display, digital signage, financial, broadcast, entertainment and transportation applications. The LCS5730 features full metal construction, 1920 x 1080p (progressive scan) native resolution, extremely fast 6.5ms response time for crystal clear video performance and RS232C for external control.

With its slim design, super wide viewing angle, HD resolution, advanced video processing, high color saturation and color accuracy, low power consumption and long service life the LCS5230 is the perfect choice for your next project.

## Features

- Variable Black Level Adjustment
- Variable Back Light Adjustment
- Advanced Video Processing
- Durable Metal Construction
- Picture in Picture, Picture and Picture
- AutoAmbient Brightness Compensation
- Fanless Design for Quiet Operation
- Anti-Reflective Coated LCD panels
- 176+ Degree H / V Viewing Angle
- Infrared and RS232 Control
- VESA Mounting Hole Pattern
- Approvals: cUL / FCC
- One Year Parts & Labor Warranty
- Extended Warranties Available

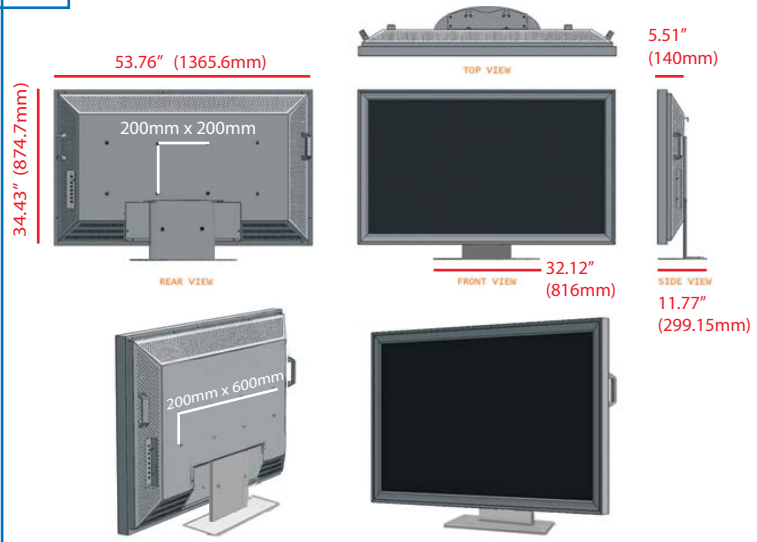

## Specifications

Technology:	TFT LCD	Inputs:	DVI-D, VGA (D15), S-Video, Composite Video, Component video (YPbPr, YCbCr)	Compliance:	FCC, CE, cUL
Screen diagonal:	57" (1447.8 mm)	Resolutions Supported:	NTSC/PAL/SECAM, 720i/p, 1080i/p, XGA, WXGA, SXGA, SXGA+, UXGA	Weight:	130 lb (51kg)
Screen area:	48.24" x 27.85" (1225 x 707 mm)	Control:	RS232C (with loop through)	Gross Weight:	152 (61kg)
Resolution:	1920 x 1080p	Mounting:	VESA 200x200, 200x600mm	<b>Included Accessories:</b> Power cord, D-SUB 15pin cable, DVI-D 24 pin cable, S-VIDEO cable, Component Mini Din 8 pin cable, RCA cable, Remote control, User's manual	
Brightness:	500 cd/m <sup>2</sup>	Voltage:	100 - 240V (50Hz-60Hz)	<b>OPTIONS</b>	
Contrast ratio:	1500:1	Power:		• Tempered Glass	
Colors:	16.7 million	Consumption:	290W (On) <20W Stand-By	• Bottom Speakers	
Lifetime:	50,000h average	Operating Temp:	41° to 104°F (5° to 40°C)	• HD-SDI Input	
Color gamut:	76% NTSC	Op. Humidity:	20 - 85%	• Audio Amp	
Aspect ratio:	16:9				
Viewing angle:	176°/176°				
Response time:	6.5ms GtoG				
Color Control:	3200K-9300K, User				